



Cisco

300-375 Exam

Cisco Securing Wireless Enterprise Networks Exam

Thank you for Downloading 300-375 exam PDF Demo

You can Buy Latest 300-375 Full Version Download

<https://www.certkillers.net/Exam/300-375>

<https://www.certkillers.net>

Version: 12.0

Question: 1

Which two considerations must a network engineer have when planning for voice over wireless roaming? (Choose two.)

- A. Roaming with only 802.1x authentication requires full reauthentication.
- B. Full reauthentication introduces gaps in a voice conversation.
- C. Roaming occurs when the phone has seen at least four APs.
- D. Roaming occurs when the phone has reached -80 dBm or below.

Answer: A, B

Question: 2

Which two 802.11 methods can be configured to protect card holder data? (Choose two.)

- A. CCMP
- B. WEP
- C. SSL
- D. TKIP
- E. VPN

Answer: CE

Question: 3

An engineer is changing the authentication method of a wireless network from EAP-FAST to EAP-TLS. Which two changes are necessary? (Choose two.)

- A. Cisco Secure ACS is required.
- B. A Cisco NAC server is required.
- C. All authentication clients require their own certificates.
- D. The authentication server now requires a certificate.
- E. The users require the Cisco AnyConnect client.

Answer: CD

Question: 4

Which mobility mode must a Cisco 5508 wireless Controller be in to use the MA functionality on a

cisco catalyst 3850 series switch with a cisco 550 Wireless Controller as an MC?

- A. classic mobility
- B. new mobility
- C. converged access mobility
- D. auto-anchor mobility

Answer: C

Question: 5

WPA2 Enterprise with 802.1x is being used for clients to authenticate to a wireless network through an ACS server. For security reasons, the network engineer wants to ensure only PEAP authentication can be used. The engineer sent instructions to clients on how to configure their supplicants, but users are still in the ACS logs authentication using EAP-FAST. Which option describes the most efficient way the engineer can ensure these users cannot access the network unless the correct authentication mechanism is configured?

- A. Enable AAA override on the SSID, gather the usernames of these users, and disable their RADIUS accounts until they make sure they correctly configured their devices.
- B. Enable AAA override on the SSID and configure an access policy in ACS that denies access to the list of MACs that have used EAP-FAST.
- C. Enable AAA override on the SSID and configure an access policy in ACS that allows access only when the EAP authentication method is PEAP.
- D. Enable AAA override on the SSID and configure an access policy in ACS that puts clients that authenticated using EAP-FAST into a quarantine VLAN.

Answer: D

Question: 6

An engineer is configuring a BYOD deployment strategy and prefers a single SSID model. Which technology is required to accomplish this configuration?

- A. mobility service engine
- B. wireless control system
- C. identify service engine
- D. Prime Infrastructure

Answer: C

Question: 7


When you configure BYOD access to the network, you face increased security risks and challenges. Which challenge is resolved by deploying digital client certificates?

- A. managing the increase connected devices
- B. ensuring wireless LAN performance and reliability
- C. providing device choice and support
- D. enforcing company usage policies

Answer: D


Question: 8

Scenario

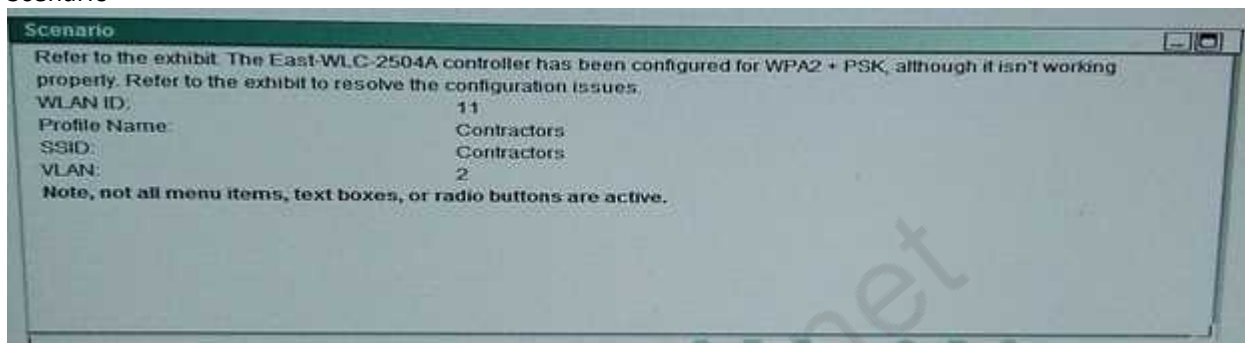


TOPOLOGY

Topology

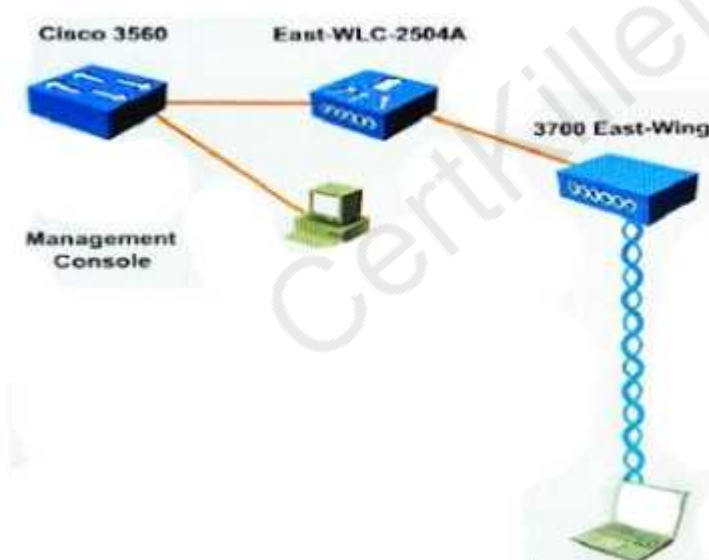

MONITOR

Monitor **Summary** 5 Access Points Supported



Controller Summary

Management IP Address	192.168.1.99 / 1/128
Software Version	8.0.110.0
Field Recovery Image Version	7.6.101.1
System Name	WLC1-2504A
Up Time	0 days, 5 hours, 14 minutes
System Time	Wed Feb 11 15:38:52 2015
Redundancy Mode	N/A
Internal Temperature	+27 C

Controller Summary

Management IP Address	192.168.1.99 / 1/128
Software Version	8.0.110.0
Field Recovery Image Version	7.6.101.1
System Name	WLC1-2504A
Up Time	0 days, 5 hours, 14 minutes
System Time	Wed Feb 11 15:38:52 2015
Redundancy Mode	N/A
Internal Temperature	+27 C
802.11a Network State	Enabled
802.11b/g Network State	Enabled
Local Mobility Group	testlab
CPU(e) Usage	0%
Individual CPU Usage	0%/1%, 0%/2%
Memory Usage	50%

Access Point Summary

	Total	Up	Down	
802.11a/n/ac Radios	1	1	0	Detail
802.11b/g/n Radios	1	1	0	Detail
Dual-Band Radios	0	0	0	Detail
All APs	1	1	0	Detail

Client Summary

Current Clients	0	Detail
Excluded Clients	0	Detail
Disabled Clients	0	Detail


WLANS

WLANS

Current Filter: None [\[Change Filter\]](#) [\[Clear Filter\]](#)

WLAN ID	Type	Profile Name	WLAN SSID	Admin Status	Security Policies
10	WLAN	Contractors	Employees	Disabled	{WPA2}{Auth(802.1X)}

CONTROLLER

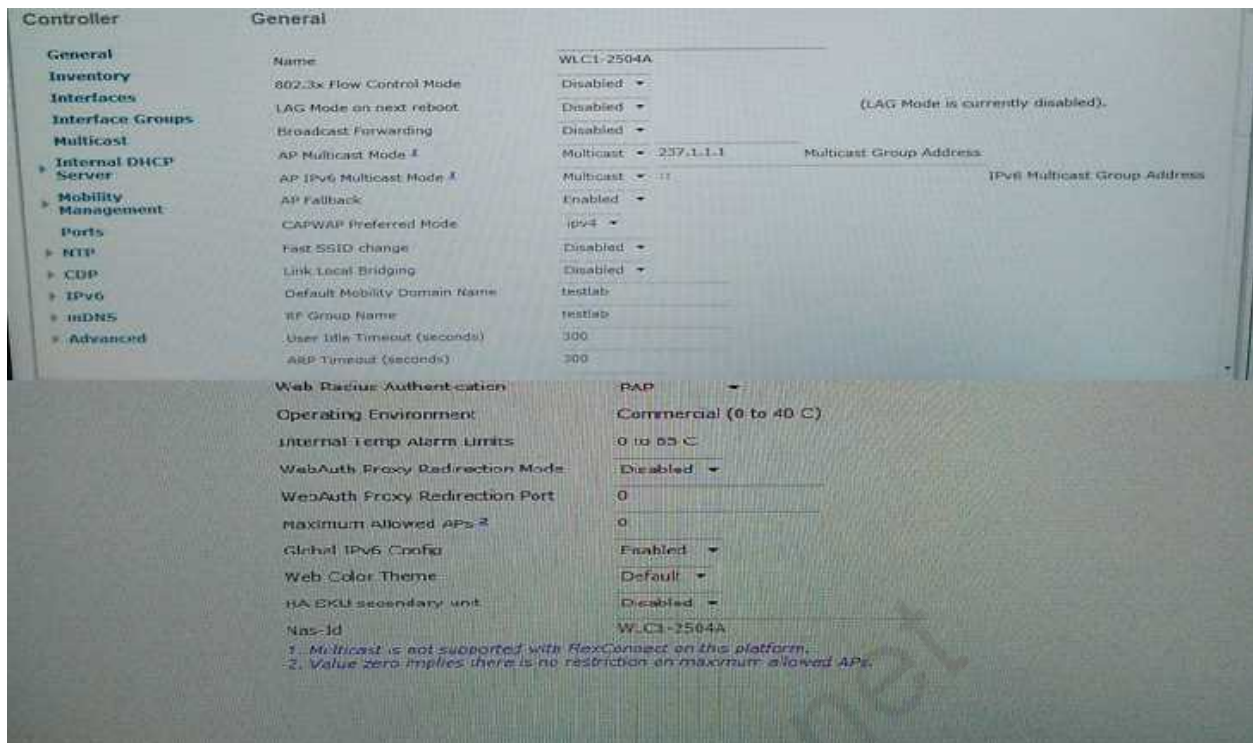

WIRELESS


All APs

Current Filter: None [Change Filter] [Clear Filter]

Number of APs: 2

AP Name	IP Address(Ipv4/Ipv6)	AP Model	AP MAC	Ap Up Time	Admin Status	Operational Status	Pol. Status	No. of Clients	Port	AP Mode
3700-East-Wing	192.168.1.128	AIR-CT5502I-A-K9	b8:30:61:04:04:06	0d, 01:07:35s	Enabled	REC	Normal power	0	1	local
3700-West-Wing	192.168.1.100	AIR-CT5502I-A-K9	b8:30:61:01:05:20	0d, 30:22:21s	Enabled	REC	Normal power	0	1	local

SECURITY

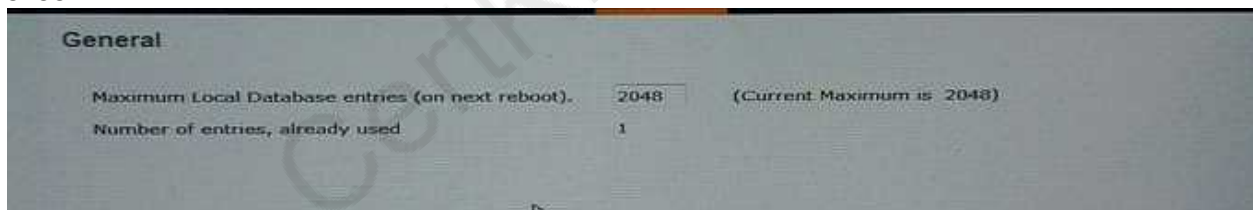

Which configuration changes need to be made to allow WPA2 + PSK to operate property on the East-WLC-2504A controller? (Choose four.)

- A. Disable Dynamic AP Management.
- B. Click on the Status Enabled radio button.
- C. Change the Layer 3 Security to Web Policy.
- D. Change the WPA + WPA2 Parameters to WPA2 Policy-AES.
- E. Change the PSK Format to HEX.
- F. Change the WLAN ID.
- G. Change the VLAN Identifier.
- H. Change the IP Address of the Virtual interface.
- I. Change the SSID name of the WLAN.
- J. Click on the PSK radio button and add the password in the text box.

Answer: B, F, I, J

Question: 9

Refer to the exhibit.



What is the 1.1.1.1 IP address?

- A. the wireless client IP address
- B. the RADIUS server IP address
- C. the controller management IP address
- D. the lightweight IP address
- E. the controller AP-manager IP address
- F. the controller virtual interface IP address

Answer: F

Question: 10

A Customer is concerned about denial of service attacks that impair the stable operation of the corporate wireless network. The customer wants to purchase mobile devices that will operate on the corporate wireless network. Which IEEE standard should the mobile devices support to address the customer concerns?

- A. 802.11w
- B. 802.11k
- C. 802.11r
- D. 802.11h

Answer: A

Question: 11

DRAG DROP

A wireless engineer wants to schedule monthly security reports in Cisco Prime infrastructure. Drag and drop the report title from the left onto the expected results when the report is generated on the right.

Adaptive wIPS Alarm Summary	Displays a summarized count of all rogue access points on your network.
Adhoc Rogue Count Summary	Displays a summary of security alarm trends over a period of time.
Rogue AP Count Summary	Displays a summarized count of all ad hoc rogue access points.
Security Alarm Trending Summary	Displays a summary of all adaptive wIPS alarms on your network.

Answer:

- Rogue AP Count Summary
- Security Alarm Trending Summary
- Adhoc Rogue Count Summary
- Adaptive wIPS Alarm Summary

Question: 12

An engineer is configuring client MFP. What WLAN Layer 2 security must be selected to use client MFP?

- A. Static WEP
- B. CKIP
- C. WPA+WPA2
- D. 802.1x

Answer: C

Question: 13

Which two events are possible outcomes of a successful RF jamming attack? (Choose two.)

- A. unauthentication association
- B. deauthentication multicast
- C. deauthentication broadcast
- D. disruption of WLAN services
- E. physical damage to AP hardware

Answer: DE

Question: 14

Which CLI command do you use on Cisco IOS XE Software to put the AP named Floor1_AP1 back in the default AP group?

- A. ap Floor1_AP1 ap-groupname default-group
- B. ap name Floor1_AP1 apgroup default-group
- C. ap name Floor1_AP1 ap-groupname default-group
- D. ap name Floor1_AP1 ap-groupname default

Answer: C

Question: 15

An engineer is configuring a new mobility anchor for a WLAN on the CLI with the config wlan mobility anchor add 3 10.10.10.10 command, but the command is failing. Which two conditions must be met to be able to enter this command? (Choose two.)

- A. The anchor controller IP address must be within the management interface subnet.
- B. The anchor controller must be in the same mobility group.
- C. The WLAN must be enabled.
- D. The mobility group keepalive must be configured.
- E. The indicated WLAN ID must be present on the controller.

Answer: AB

Thank You for trying 300-375 PDF Demo

To Buy Latest 300-375 Full Version Download visit link below

<https://www.certkillers.net/Exam/300-375>

Start Your 300-375 Preparation

[Limited Time Offer] Use Coupon “CKNET” for Further discount on your purchase. Test your 300-375 preparation with actual exam questions.

<https://www.certkillers.net>