



**Cisco**

**642-964**

*Cisco Data Center Networking Infrastructure Solutions  
Support*

**Answer:** D

**QUESTION:** 51

What must be configured on the FWSM to forward traffic to a filtering server?

- A. the filtering server as an authentication provider (aaa-server)
- B. all web traffic so that it is directed only to the filtering server (access-list)
- C. all HTTP requests so that they are redirected to the filtering server (fixup protocol)
- D. all HTTP requests so that they are sent to the filtering server (url-server)

**Answer:** D

**QUESTION:** 52


How many IDSMs can be aggregated using a single EtherChannel in a highly available configuration?

- A. 2
- B. 4
- C. 8
- D. 32

**Answer:** C

**QUESTION:** 53

Refer to the exhibit.

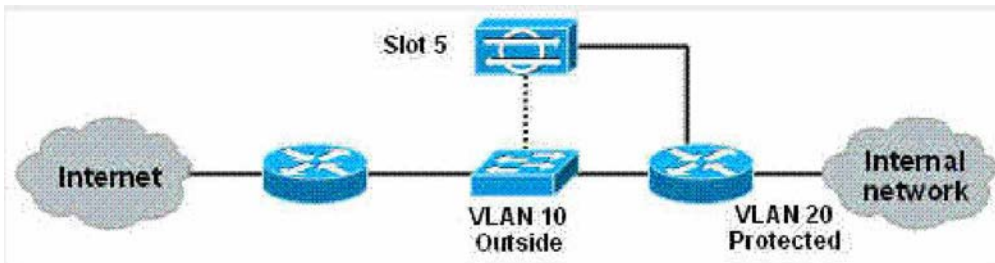

Given this network design, which command would you use to configure traffic capture on the IDS?

- A. monitor session 1 source vlan 10

- B. monitor session 1 source vlan 20
- C. intrusion-detection module 5 data-port 1 access-vlan 10
- D. intrusion-detection module 5 data-port 1 access-vlan 20

**Answer:** A

**QUESTION:** 54

How do you enable the use of Cisco Adaptive Security Device Manager on an existing FWSM?

- A. Enable SNMP.
- B. Enable SSH.
- C. Enable the HTTPS server.
- D. Enable multiple contexts.

**Answer:** C

**QUESTION:** 55

What is the implication of executing the command failover interface-policy 2 on an FWSM?

- A. The configured failover interface policy will be applied to VLAN 2.
- B. The FWSM will fail over when more than one VLAN interface fails.
- C. The second configured failover interface policy will be applied to the FWSM.
- D. The FWSM will become active when it fails to receive two consecutive heartbeats from the paired FWSM.

**Answer:** B

**QUESTION:** 56

Which three values are user-configurable for risk ratings on the IDSM? (Choose three.)


- A. Target Value Rating
- B. Signature Age Rating
- C. Alert Reliability Rating
- D. Attack Severity Rating

- E. Signature Fidelity Rating
- F. Attack Probability Rating

**Answer:** A, D, E

**QUESTION: 57**

Refer to the exhibit.

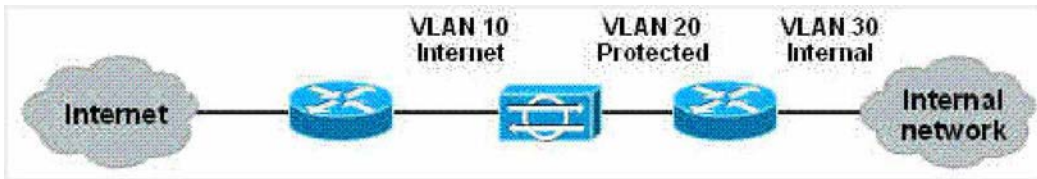

Given this network design, which command would you use to configure traffic capture on the IDSM?

- A. monitor session 1 source vlan 10
- B. monitor session 1 source vlan 20
- C. intrusion-detection module 5 data-port 1 access-vlan 30
- D. intrusion-detection module 5 data-port 1 access-vlan 20

**Answer:** D

**QUESTION: 58**

What information is displayed when you execute this command on the IDSM?  
show settings

- A. the management IP address
- B. the IDSM interface configuration
- C. the VLANs that are configured for traffic capture
- D. the VLANs that are configured for management access

**Answer:** A

**QUESTION: 59**

A POP3 and an SMTP server must be visible at the same address through an FWSM. Which type of NAT is required?

- A. dynamic NAT
- B. identity NAT
- C. policy dynamic NAT
- D. static NAT

**Answer:** D

**QUESTION:** 60

How many capture files can be stored on an IDS?

- A. 1
- B. 4
- C. 8
- D. 32

**Answer:** A

Download Full Version From <https://www.certkillers.net>



**DON'T KNOW**  
OR NO PREFERENCE

*Pass your exam at First Attempt....Guaranteed!*