

EMC

E20-807 Exam

Expert - VMAX All Flash and VMAX3 Exam

Thank you for Downloading E20-807 exam PDF Demo

You can Buy Latest E20-807 Full Version Download


https://www.certkillers.net/Exam/E20-807

Version: 8.0

Question: 1

Based on the Array Utilization Dashboard shown in the exhibit, a frontend port is showing higher utilization on Director 1.

How can this situation be corrected?

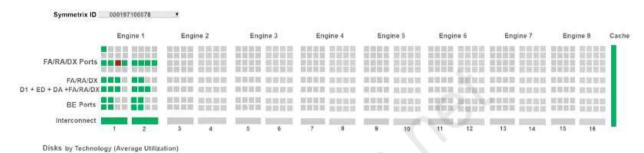

- A. Add another engine to provide for Frontend Emulation CPUs
- B. Redistribute the workload onto other available ports
- C. Increase cache on the engine
- D. Add additional capacity to support the frontend workload

Question: 2

Please check the option that best describes your relationship with Dell EMC.

- A. Dell EMC Employee
- B. Dell EMC CustomerPartner
- C. Other

Answer: B

Question: 3

FILL IN THE BLANK

Please enter your Powerlink Username below. If you do not have a Powerlink Username or do not know your Powerlink Username enter none.

Powerlink Username: _____

	Answer: John_Doe
Question: 4	
SRDF/Metro has been deployed. What is the state and external identity synchronization has completed?	y of the R2 devices after initial
A. State: Read/WriteIdentity: R1 Identity B. State: Read/WriteIdentity: Original Identity C. State: Write DisabledIdentity: Original Identity	
D. State: Write DisabledIdentity: R1 Identity	
	Answer: A
Question: 5	
What is requirement when setting up a Composite Group (CG) for Senvironment?	SRDF/Star in an open systems
A. Composite Group is created with the Star Build CG action B. Composite Group is created with the type set to ANY C. Recovery group assignments should match the recovery groups defir D. Names assigned to RDF groups match the site names in the Star Opti	•
	Answer: C
Question: 6	
What is a Dell EMC recommended best practice when connecting Cloud	dArray to a VMAX3?
A. Hosts should average at least 2,500 IOPS	
B. Internal SRP should be used	
C. Host I/O limits should be used	
D. Host I/O limits should not be used	
	Answer: B
Question: 7	
Question. /	

SRDF/Metro has been deployed between two data centers. SRDF/Metro is operating normally. Maintenance tasks at the R1 data center require the array to be offline.

Which SRDF operation should be executed on the Metro RDF pairs to facilitate the planned outage without affecting application I/O?

A. Failover

- B. Split with bias set to R2
- C. Suspend with bias set to R2
- D. Swap

Answer:	Δ
Aliswei.	$\overline{}$

Question: 8

FAST.X needs to be configured on a VMAX3 array to access LUNs on an XtremIO X-Brick. In addition, existing data on the LUNs has to be preserved and made available for host access. How can this be accomplished?

- A. By externally provisioning the LUNs
- B. By incorporating the LUNs
- C. By zoning the host HBAs to the VMAX3 array FE ports
- D. By zoning the host HBAs to the VMAX3 array DX ports

Answer: B

Thank You for trying E20-807 PDF Demo

To Buy Latest E20-807 Full Version Download visit link below

https://www.certkillers.net/Exam/E20-807

Start Your E20-807 Preparation

[Limited Time Offer] Use Coupon "CKNET" for Further discount on your purchase. Test your E20-807 preparation with actual exam questions.