



# Juniper

JN0-420 Exam

Juniper NCIS-DevOps Exam

Thank you for Downloading JN0-420 exam PDF Demo

You can Buy Latest JN0-420 Full Version Download

<https://www.certkillers.net/Exam/JN0-420>

<https://www.certkillers.net>

## Version: 9.0

---

### Question: 1

---

Which command is valid for accessing a Junos device using the RESTful API on the default port?

A)

```
curl http://user:pass123@192.168.1.1/rpc/get-interface-information?interface-name=lo0
```

B)

```
curl http://192.168.1.1/rpc/get-interface-information?interface-name=lo0 -u "user:pass123"
```

C)

```
curl -u "user:pass123" http://192.168.1.1:80/rpc/get-interface-information?interface-name=lo0
```

D)

```
curl http://user:pass123@192.168.1.1:3000/rpc/get-interface-information?interface-name=lo0
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

---

**Answer: C**

---

---

### Question: 2

---

You need to reset all Junos systems in your lab to their factory-default state and then push a new configuration to the device.

Which two Ansible modules would your playbook use to accomplish this task? (Choose two)

- A. junos\_system\_services
- B. junos\_zeroize
- C. junos\_get\_facts
- D. junos\_install\_config

---

**Answer: B,D**

---

Explanation:

References:

[https://www.juniper.net/documentation/en\\_US/junos-ansible1.0/topics/example/junos-ansible-playbooks-device-zeroize](https://www.juniper.net/documentation/en_US/junos-ansible1.0/topics/example/junos-ansible-playbooks-device-zeroize)

[https://www.juniper.net/documentation/en\\_US/junos-ansible1.0/topics/example/junos-ansible-playbooks-device-configuring](https://www.juniper.net/documentation/en_US/junos-ansible1.0/topics/example/junos-ansible-playbooks-device-configuring)

---

### Question: 3

---

Click the Exhibit button.

Exhibit:

Ansible playbook:

```
- - -  
- name: Get facts  
hosts: r0  
connection: local  
gather_facts: no  
roles:  
  - Juniper.junos  
tasks:  
  - name: Execute junos_get_facts console  
    Junos_get_facts:  
    host: "{{inventory_hostname}}"  
    user: "root"  
    console: "--telnet=console_server, 555"  
    logfile: ""  
    savedir: "./facts"
```

The r0 device is currently in a factory-default state. The console connection of r0 is reachable using Telnet on TCP port 555 of the console\_server host.

Referring to the exhibit, which statement is true?

- A. The device does not require configuration changes for the playbook to run successfully
- B. The Telnet service must be configured for the playbook to run successfully
- C. A password for the root user must be configured for the playbook to run successfully
- D. The NETCONF service must be configured for the playbook to run successfully

---

**Answer: D**

---


---

#### Question: 4

---

Click the Exhibit button.

Exhibit:

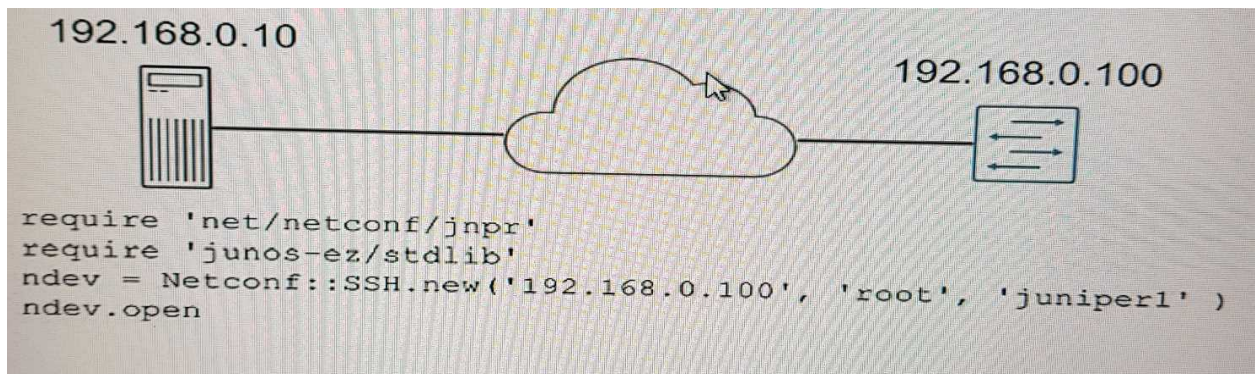

You are using RubyEZ to interact with a Junos device: however, you are not successfully connecting to the device.

Referring to the exhibit, what is the problem?

- A. Argument passed to Netconf::SSH.new statement must be referenced as variables
- B. Netconf::SSH.new statement only expects an IP address of the target device
- C. Netconf::SSH.new statement arguments must be hashes
- D. A Junos::Ez::Provider statement is missing before the Netconf::SSH. New statement

---

**Answer: A**

---



---

### Question: 5

---

Click the Exhibit button.

Exhibit:

```
policy SSHD_LOGIN_FAILED {
    events sshd_login_failed;
    then {
        event-script event.py;
    }
}
event-script {
    file event.py;
}
```

How would you test the configuration snippet shown in the exhibit?

- A. Use the root@router% logger SSHD\_LOGIN\_FAILED command
- B. Use the root@router% logger -e SSHD\_LOGIN\_FAILED command
- C. Use the root@router% test SSHD\_LOGIN\_FAILED command
- D. Use the root@router% event SSHD\_LOGIN\_FAILED command

---

**Answer: B**

---

---

**Question: 6**

---

Which two statements are correct about JSON characteristics? (Choose two)

- A. JSON is a supported template language
- B. JSON is easy to read for humans and devices
- C. JSON uses ## for comments
- D. JSON is programming language independent

---

**Answer: B,D**

---

---

**Question: 7**

---

Click the Exhibit button.

Exhibit:

```
action = jcs.get_snmp_action  
oid = jcs.get_snmp_oid
```

Where would the Python code shown in the exhibit be used?

- A. a commit script
- B. an op script
- C. an event script
- D. an SNMP script

---

**Answer: D**

---

## Thank You for trying JN0-420 PDF Demo

To Buy Latest JN0-420 Full Version Download visit link below

<https://www.certkillers.net/Exam/JN0-420>

## Start Your JN0-420 Preparation

**[Limited Time Offer]** Use Coupon “CKNET” for Further discount on your purchase. Test your JN0-420 preparation with actual exam questions.

<https://www.certkillers.net>